

MSSIAH

MIDI SID SOFTWARE

Bassline

Introduction.....	4
Using the MSSIAH Bassline.....	5
Starting Up.....	5
Main Screen.....	5
Sequencer.....	6
Modes.....	6
Normal Mode.....	6
Pitch Mode.....	6
Time Mode.....	6
Transpose Mode.....	6
Setup Screen.....	7
Quit/Reboot.....	7
User Input Controls.....	8
Joystick.....	8
Potentiometers.....	8
Select Control.....	8
Assigning Potentiometers.....	9
MIDI Mode.....	10
MIDI Channel.....	10
Mode.....	10
Bend Range up.....	10
Bend Range down.....	10
Control Change Messages.....	11
Entering Pattern Data via Control Change.....	11
Note Length Trig Problem.....	12
Playing Patterns.....	13
Open the Demo Patterns.....	13
Select Patterns.....	13
Run Mode.....	13
Tempo.....	14
Pattern Groups.....	14
Shuffle.....	14
Chain Play.....	14
Transpose.....	14
External Pattern Select.....	15
External Synchronizing.....	15
Editing Patterns.....	16
Pitch Mode.....	16
Play or Hold.....	16
Time Mode.....	17
Slides / Octaves.....	17
Pattern Length.....	18
Graphic Note and Time Line Display.....	18
Insert and Delete.....	18
Cut / Copy / Paste.....	19
Edit the Sound.....	20
Tuning.....	20
Cutoff.....	20
Resonance.....	20
Env.....	20
Decay.....	20

Accent.....	20
Select Waveform.....	20
Pulse width.....	20
A word about the SID filter.....	21
How to Improve Audio Quality.....	21
Tap.....	21
Settings.....	22
Controls.....	22
Synchronization.....	22
System.....	23
Slide Time.....	23
Advanced Random Composer.....	24
Lock Notes.....	24
Length.....	24
Range.....	24
Slide.....	25
Accent.....	25
Group/Section/Pattern.....	25
Random!.....	25
Example.....	25
Editor.....	25
Navigating.....	26
Delete.....	26
Insert.....	26
Clear pattern.....	26
Alter notes.....	27
Change pattern.....	27
Toggle grid.....	27
Files.....	28
Media.....	28
Opening the Demo Patterns.....	30
Save Project.....	30
Open Project.....	31
Export Pattern.....	32
Import Pattern.....	33
Example Guide to Editing Patterns.....	35
Key Map.....	37
MIDI Implementation Chart.....	39
MIDI Controller List.....	40

Introduction

The MSSIAH Bassline is a Roland TB-303 *simulator* for the Commodore 64. Utilizing the same pattern sequencer and an audio engine that mimics the classic machine's behavior it can very well function as a poor man's acid box.

Note that we emphasized the word 'simulator', here's why:

The subject of emulating the 303 is not entirely without controversy. Every initiated TB-303 user all over the world is aware of one simple fact: the magical soul of the legendary Roland bass machine simply cannot be duplicated. The circuitry and sequencer software combined created a creature with such a rich animated sound that none of the dozens of "clones" that flooded the market in the late 90s were able to classify as carriers of the acid tradition.

People not into the TB-303 are probably not fully clear of what the fuzz is all about (if you are one of them, relax and lead your life on happily unaware of what you're missing).

Either way we hope that you will find use for the MSSIAH Bassline as a freaky crossing between a TB-303 and personal computer from the 80s. Because weighing in that it's actually a Commodore 64 that is producing the bass lines the result will most likely make people raise an eyebrow or two after all.

The C64 as a 303

The one element that distinguishes synthesizers (and especially the 303) is the filter and that is where the C64 comes to a halt when 'emulating' the silver box.

Using the SID 8580 is essential when running the MSSIAH Bassline. It is not the ideal chip to mimic a 303 but the one SID that stands a decent chance. Actually, people using a SID 6581 will probably laugh at the very idea of resembling anything close to classic acid sounds.

Since the 6581 frequency response is not really inline with the Bassline's audio engine, people favoring the 6581 will more likely find better use for the MSSIAH Mono Synthesizer.

Features

The MSSIAH Bassline has got the same features as its bigger brother Mono Synthesizer yet with an audio engine aimed at 303 sounds. This means that up to four game paddles (or home built potentiometers) can be hooked up and control four virtual knobs simultaneously.

The pattern sequencer can be synchronized with a MIDI clock from the MSSIAH's MIDI input.

Running in full MIDI, Bassline accepts note messages to play along your MIDI sequencer. By utilizing legato you automatically trigger slides. Hammer on some more velocity and you have got yourself an accent.

MSSIAH Bassline responds to control change messages to control the sound parameters in real time via MIDI. There are even control change messages to program patterns right into the built in sequencer.

MIDI mode can be run as full note-mode MIDI (play the Bassline with your MIDI keyboard) or play back patterns in time with the MIDI clock and accept control change messages at the same time. That way you don't have to fiddle with your master sequencer to make the note length sound 303ish, let MSSIAH Bassline handle it for you instead.

This manual covers all the things you need to know to operate the program

Using the MSSIAH Bassline

Starting Up

To start the Bassline, select *Bassline* in the startup menu and press return. The program loads from the cartridge and starts up within 5 seconds.




Note:

The user is strongly advised to carefully read the instructions on how to properly handle the cartridge in the booklet *MSSIAH - Getting Started* available for download on our site at <http://www.mssiah.com>.

Main Screen

The Bassline Main Screen is the default outlook on startup. From here you alter the sound and edit patterns.

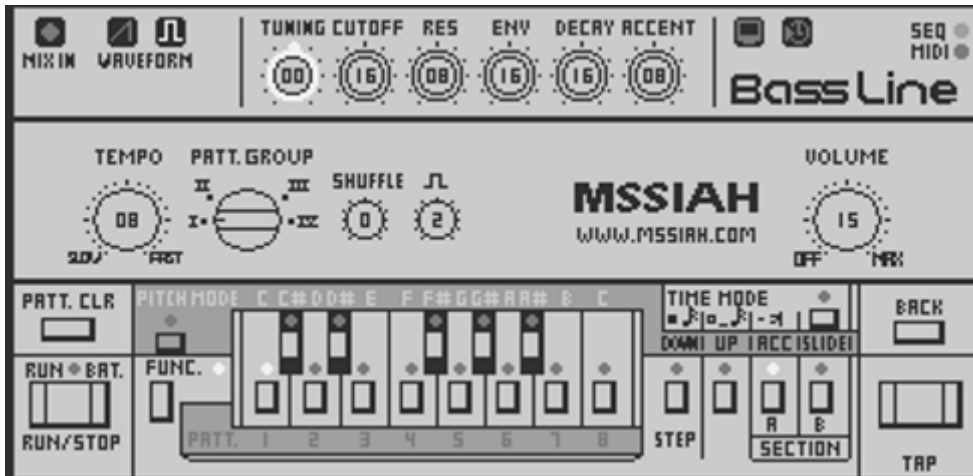

The Main Screen is divided into three parts where the upper one contains sound controls to shape the sound. The middle part has controls for adjusting tempo, pattern banks, main volume etc, and the lowest part of the screen is the step sequencer where you edit and play bassline patterns.

Sequencer

The Sequencer is where you create a pattern to play the sounds. It closely resembles the Roland TB-303 step sequencer and operates in three different modes; *Normal Mode* (for playing), *Pitch Mode* (for entering note data) and *Time Mode* (to enter a timeline for your notes).



Beginners may have some difficulties to grasp the concept at first but once you get a hold of it you will see the great potential in creating interesting compositions with this tool. However, there is an additional graphic editor in the *Advanced Random Composer*.

Modes

The Bassline step sequencer on the Main Screen operates in three different modes:

Normal Mode

Normal Mode is the default mode in which you are free to edit sounds, select and play patterns and synchronize the MSSIAH to external units.

Pitch Mode

In Pitch Mode you enter and edit all the notes for the current pattern. When Pitch Mode is activated playing stops and sounds cannot be edited until you return to Normal Mode.

Time Mode

Here is where you enter the timeline for the notes in the current pattern. When Time Mode is activated playing stops and sounds cannot be edited until you return to Normal Mode.

Transpose Mode

Not really an operating mode but a special state in Normal Mode, transposing is activated to effectively alter the transpose setting for the current pattern playing.

Setup Screen

By pressing **CTRL** key, you access the second screen of the Bassline. From here you can alter settings like MIDI, current controls (joy/pot) and system setting (PAL or NTSC). The Setup Screen also contains file operations to save and load your projects as well as individual patterns.



Furthermore, the Advanced Random Composer feature helps you to create random patterns.

The Setup Screen user interface is a DOS like environment with several windows. You open the windows with the drop-down menu using the **CRSR** keys, **RETURN** and **←** keys.

Quit/Reboot

You can quit the Bassline and return to the startup menu at anytime by entering the Setup Screen (**CTRL** key) and select the *Reboot* menu item in the *QUIT* menu.

User Input Controls

MSSIAH Bassline uses two types of input controls: Joystick and Potentiometers.

Joystick

Joystick is the default input control. Moving the joystick up and down makes the current parameter increase or decrease. To speed up the rate of alteration press the **FIRE** button. Joysticks are plugged into controller port #2. That is the one just next to the power switch.

Potentiometers

A potentiometer is a variable resistor that changes its resistance when you turn its knob. The Commodore 64 is capable of sampling the resistance value for applications such as the MSSIAH or Prophet64.

Four potentiometers are handled simultaneously by connecting two pots into each controller port.

Technically, it is the audio chip inside the computer that takes care of handling the potentiometers. If your audio chip's pot-readers are defective in any way, one or more pots cannot be used and the same goes for a computer with the audio chip pulled out. Check out the port diagnostics in the MSSIAH Cartridge startup menu to test your potentiometers.

Old game paddles designed for Commodore computers are in fact potentiometers. If you manage to find one or two of those, you have a true retro style computer and are more than ready to start tweaking the Bassline. If not, you can build one yourself. Check out the booklet *MSSIAH - Getting Started* on our website for schematics.

Select Control

Being a modern computer user, one has gotten used to things like plug and play these days. However, the MSSIAH Bassline has no way of auto-detecting the control currently attached to your computer. Unless you just started up the application and intend to run a joystick (default), you will have to take care of setting the controls yourself:



- Open the Setup Screen by pressing the **CTRL** key.
- Navigate with the **CRSR** keys to the second menu from the left: *SETTINGS*
- Open up the drop-down menu and select *Controls*.

The first option sets the current control type, either joystick or potentiometers (*POT / JOY*). As you select POT, all four potentiometers can be turned on or off individually.



The second option blocks the potentiometers unless the **LEFT SHIFT** key is depressed. Why?

Well, as you will notice, potentiometers can be a bit 'shaky' switching values periodically.

It's not so much of a problem when turning the VCF frequency or LFO amount but causes unintentional tweaks in case you select the wrong parameter by accident.

The L-Shift option only passes through your pot movements whenever the **LEFT SHIFT** key is depressed. Release it and the pots have no effect on the parameter value.

With the L-Shift option activated it is fully possible to hit the **CAPS LOCK** key and manually cancel the shift key prevention. This is not recommended as it may cause C64 keyboard conflicts and select unwanted parameters.

Assigning Potentiometers

When using potentiometers in the Main Screen you can tweak them all at the same time and all the knobs will turn accordingly. The first pot, POT 1-X can be moved around to edit any parameter. The three other pots are fixed.

Alias	Controller port pin	Parameter
1-X	1	Select any parameter
2-X	2	Fixed at Resonance
1-Y	1	Fixed at Envelope
2-Y	2	Fixed at Decay

MIDI Mode


When started up, MSSIAH Bassline operates in *Sequencer* mode.

That means it plays the pattern sequencer to an internally generated clock signal or, if activated, an external MIDI clock.

The MIDI mode however, is an extensive MIDI operational mode where Bassline accepts both MIDI notes and control change messages to alter sound parameters. To activate MIDI mode, press **RIGHT SHIFT** key together with the \uparrow key.

When operating in MIDI mode the screen is completely blanked out. To quit MIDI mode press the **RUN/STOP** key and the screen comes back to normal again.

To enter MIDI settings go to the Setup Screen and select *Settings / MIDI*.

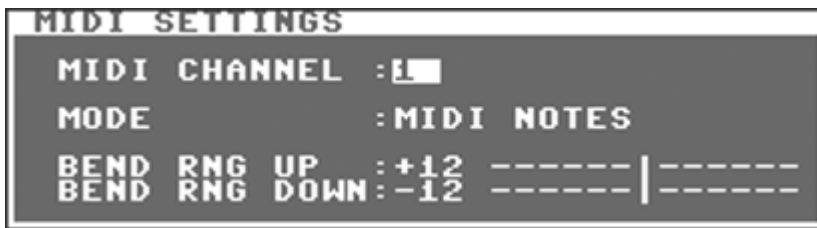

MIDI Channel

The MIDI channel parameter sets the receive channel 1-16 or off (displayed with two dashes - -). It does not make a lot of sense turning off the receive channel but since the MSSIAH Sequencer application is capable of handling six MIDI channels simultaneously it can also turn off individual tracks. The other applications (such as the Bassline) use it for compatibility reasons.

Mode

When switched to MIDI mode Bassline awaits MIDI input such as note events (key on and key offs) and control change messages.

However, by selecting *Patterns* instead of *MIDI notes*, MIDI mode will ignore all MIDI note events and instead play the pattern sequencer in time with the MIDI clock. This way you can play your patterns in sync with your music and still be able to send control change messages.

You can even change patterns freely within all four groups.

This is different from using the sequencer in external sync mode where it only plays to an external clock and doesn't give you any more MIDI control (except rudimentary 'pattern select').

When using *MIDI notes*, legato triggers a slide and velocity levels above 80 triggers an accent.

Bend Range up

Adjust the bend range of the pitch wheel when moved upwards in 24 semitone steps.

Bend Range down

Adjust the bend range of the pitch wheel when moved downwards in 24 semitone steps.

Control Change Messages

Bassline accepts control change messages to control all sound parameters available in the program. However, keep control change messages apart with approx. 2-4 milliseconds in order for the application to have time to respond.


Entering Pattern Data via Control Change

Bassline has a feature that allows it to program a full pattern via control change messages. You can send notes and time codes into any of the 64 patterns.

- Before entering the data into a pattern the pattern must be unlocked. This means that the real data is copied into a buffer where all the edits take place thereafter.
- The step counter determines where your data is placed. You can set the step counter at any time but it increments automatically after the time code is written. When it exceeds the pattern length the buffer data is copied into the real pattern and lock mode is turned on again.
- If the step counter isn't stepped across the pattern length limit your buffer data will not be copied to the real pattern data.
- In the *MIDI Controller List* chapter you will find a complete list of all the control changes including specs for pattern edits.

The Main Screen has a nice feature that dumps the current pattern data as control change data on the screen. All you have to do is look at the screen and enter it into your sequencer and you don't have to wonder about buffers and lock modes.

Press the ↑ key to see the pattern control data. Read the messages and values from left to right.

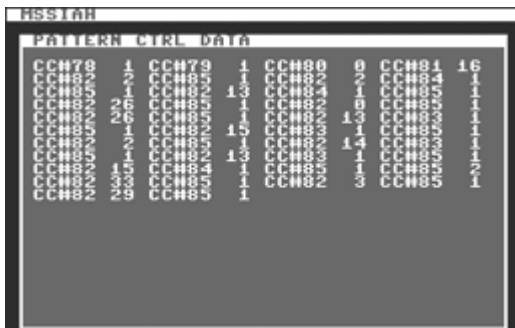

Note Length Trig Problem

Most grid editors found on popular PC/Mac sequencers will default the note length to a full 16th or 32nd note (see left image on next page).

That means the note off is sent just before the next adjacent (if any) note triggers. Though most synthesizers handle this well the SID does not. When triggering off a SID oscillator the chip needs a little extra time to recover before the next trig occurs.



Therefore, when working with an external sequencer, shorten the length of notes so that the note off doesn't get too close to the next note on (right image).

Playing Patterns

Playing patterns with the MSSIAH Bassline is pretty straightforward. However, if you only intend to use the Bassline via direct MIDI playing you can skip this and the next chapter.

Open the Demo Patterns

To have some patterns to play around with you can start by opening the demo project patterns.

Enter the Setup Screen using the **CTRL** key. Then, using the **CRSR** keys to navigate and **RETURN** key to select, choose to *Open* in the *FILE* menu.

Now select the last item, *DEMO*, then select *PATTERNS* and press **RETURN** key. Press **Y** key to confirm when asked if you are sure to load the demo.



Loading is ready in a split second. Use ← key to return to the Main Screen.

Select Patterns

Bassline memorizes a total of 64 patterns organized into four groups.

With a specific group selected you can play any of its 16 patterns.

Patterns are arranged into sections of two with eight patterns in each section.



To select a pattern use keys **1 - 8**.



To switch sections use keys **A** for section *A* and **CLR/HOME** for section *B*.

Selecting a pattern when another one is playing will put the next one on hold until it's time to play it. Patterns that are currently playing flash in sync with the current tempo. Patterns put on hold do not flash until they start playing.

Run Mode

Press the **RUN/STOP** key to start playing. The LED on the run/stop button lights to indicate that the 'machine' is now in run mode. Press **RUN/STOP** key again stop playing.



up
to

If Bassline is synced to MIDI clock the sequencer starts when the MIDI master device sends a start signal. The run/stop button has no effect.

Tempo

The tempo knob on the Main Screen controls the internal tempo. Its value corresponds to a number of fixed tempo settings.

If you are running the software on an NTSC-machine, make sure to adjust the system setting to NTSC (see the chapter *Settings* for more info).

When synchronizing the Bassline to an external clock, tempo is set with your master sequencer and no longer fixed to 16 steps.

Internal Tempo	BPM
10	139
9	125
8	114
7	104
6	96

Pattern Groups



Use the Pattern Group knob to select the current group of patterns. Each group has a total of 16 patterns.

Shuffle

The shuffle knob is next to the tempo.

Shuffle alters the 'swing' of the playback with various amounts and manipulates the sync signal accordingly. Too high a shuffle may cause drop outs at a higher tempo.

Chain Play

You can play a row of up to eight consecutive patterns by holding down the key for the first one and then the last one. The row of patterns lights up with the active one flashing.




When selecting new patterns or a new chain of patterns MSSIAH Bassline first plays through the old row of patterns before moving on to the next.

Transpose

Press and hold **F5** key to enter transpose mode while playing.

While holding F5 key, select a note for the transpose with the upper part of the C64 keyboard.

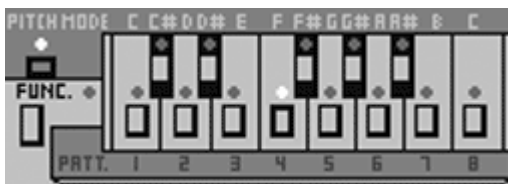

The selected transpose starts at the next measure. If a whole chain of patterns are active the transpose starts at the next round.

When you restart the sequencer, the transpose value is reset to normal (none).

Release the **F5** key to exit transpose mode.

Note:

Tips! If you want to start the transpose immediately without waiting for the next measure, hold down the **RIGHT SHIFT** key while pressing the transpose key.

External Pattern Select

All sixteen white keys between C₁ and D₃ on your MIDI keyboard correspond to pattern 1 to 16 in the current group. It is possible to play this on the MIDI receive channel during external MIDI synchronization and have the Bassline change pattern accordingly.

For this to work the Bassline's sync mode must be set to *MIDI+PSEL* in the sync settings (see the *Settings* chapter).

External Synchronizing

You can choose to synchronize the Bassline's pattern sequencer with an external MIDI clock signal or a Sync24 signal input on the user port.



To activate external synchronization and switch the Bassline to slave mode, select the clock icon parameter and press **LEFT SHIFT** key when turning your pot or pushing your joystick up to activate it. Joystick functions as a toggle on/off.

This is a safety precaution not to accidentally turn on or off external synchronization while playing live.

When external sync is active, the clock icon shifts to blue color.

In the sync settings on the Setup Screen (see the *Settings* chapter) you can choose to use a Sync24 signal fed through the user port instead. Read more about hooking up Sync24 gear to the MSSIAH in the booklet *MSSIAH - Getting Started* (available for download on our site).

Editing Patterns

Editing patterns with the MSSIAH Bassline is much like using the Roland TB-303's step sequencer. Even though beginners find the concept a bit confusing at first, it is quite simple once you learn how to use it.

If one seeks to create different harmonic textures that stand out, the TB-303 way of editing surely is a good place to start. Bassline offers some extra help by laying out the time code visually. The procedure is to first enter the notes included in the pattern. Second is to edit a time line, i.e. when and where to trigger the notes. This is quite the opposite of other sequencers where notes and time lines are blended together (like grid editors).

Note and time edits affect the currently selected pattern. When chaining patterns only the first one will be edited.


Pitch Mode

The notes are entered into the pattern in Pitch Mode. Enter Pitch Mode by pressing the **F1** key.



Pitch Mode disables sound parameters and general controls. All you can do is enter the notes into the selected pattern. The Pitch Mode LED lights up and the Normal Mode LED goes out.

A pattern contains up to 16 notes. As you press the keys **Q 2 W 3 E R 5 T 6 Y 7 U I** on the upper part of the keyboard you input the note into the pitch storage of the pattern. The note counter increments until it reaches 16 and flips over to the first note again. You can reset the counter manually at anytime by pressing the Pitch Mode button (**F1** key) once again. New notes entered overwrite old ones.

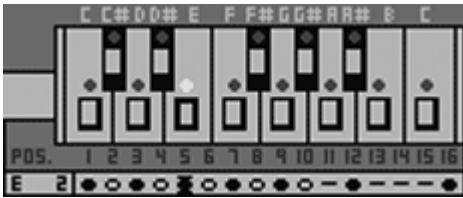

The note LED lights up when you press the corresponding key. You can see the current note and octave in the lower left corner.

Pressing the octave buttons (+ - £ keys) together with a note button toggles the note's octave.



Using the Tap (**RETURN** key) and Back (**INST/DEL** key) buttons can step through the note data back and forth without altering the notes. Press and hold the Tap button and you can alter the octaves and slide for the current note. Read more about the slide further down this chapter.

Play or Hold

The Sync window on the Setup Screen provides two different settings for handling audio playback during Pitch Mode or Time Mode edits.

HOLD means that audio is stopped if the sequencer is running and all your edits echo its sound to the audio output.

PLAY means that your edits are silent. Audio is still controlled by the sequencer and the pattern continues to play during editing.

Regardless of what you use the sequencer still stays in sync with the current clock source. Exiting Pitch or Time mode after editing using *HOLD*, the sequencer “catches up” and still plays in sync with the rest of your gear.

Note that even if a chain of patterns is playing, only the first pattern in the chain is the one that is actually being edited.


Time Mode

After entering a set of notes into the pattern it is time to create the time line.

The length of the time line is equal to the pattern length. Each step defines whether to:

- Trig a new note (i.e., pick the next one from the list of notes you entered in Pitch Mode)
- Pause 1/16th step and hold (tie) the previous note
- Pause playing, no sound for 1/16th step.

Enter Time Mode by pressing **F3** key. If the sync setting in the Setup Menu is set to *HOLD*, the sequencer stops running when entering Time Mode.



Use the following keys to define the timing information for each 1/16th note:

- + key Trig note
- key Pause and hold
- £ key Pause and silence

It is not possible to insert a pause-and-hold after a silent pause. The Time Mode editor adjusts this automatically.

Use Tap button (**RETURN** key) to step forward in the editor. The corresponding LEDs light up and display the time data for each step. Step backwards using the **DELETE** key.

When the step counter has reached the pattern length, Time Mode exits back to Normal Mode. If you wish to do this manually at anytime, press the Normal Mode button (**F7** key).

Slides / Octaves

If you press and hold the Tap button (**RETURN** key) in Pitch Mode, slides and octaves are toggled with the following keys:

- DOWN** button (+ key) one octave down
- UP** button (- key) one octave up
- +2** button (£ key) two octaves up
- SLIDE** button (CLR/HOME key) slide

Whenever the sequencer plays a note that contains a slide, it instantly starts to slide from the previous note. However, if the note was preceded by a silent pause the slide is ignored, obviously, and the note triggers as normal.

Pattern Length

Pattern lengths are variable in 16 steps. You set the length pressing and holding Normal Mode button (F7 key) and tap the DOWN button (+ key) the number of times its new length.

E.g., if you wish the pattern to be 12 steps long, press and hold F7 and tap the DOWN button twelve times.



All patterns default to a length of 16 at startup.

Graphic Note and Time Line Display

When both Time and Pitch Mode are active the graphic note and time display below the sequencer's keyboard becomes visible and shows the timing information with a cursor at the current position.



The symbol represents:

- Trig note
- Pause and hold
- ⌘ Pause and silence

By looking at the graphic display you can quickly see where and what you are editing.

In Time Mode, as you are tapping back and forth, the note at the current position is displayed in the lower left corner next to the time line.

In Pitch Mode, as you go back and forth and enter notes, the cursor moves to the next trig position.

Insert and Delete

To insert a note or time information, place the cursor where you want the insertion and press:

RIGHT SHIFT key and **INST/DEL** key.

Pitch mode inserts the same note as on the current position.

Time mode inserts the same time code as on the current position. If it's a note it also inserts the same note as on the current position.

To delete, place the cursor where you want the deletion to take place and press:

COMMODORE (C=) key and **INST/DEL** key.

The remaining pattern data to the right of the cursor is shifted one step to the left into the cursor's position.

Note that as you can only place the cursor on notes in Pitch Mode you need to enter Time Mode to insert and delete pauses.

Cut / Copy / Paste

Cut-Copy-Paste operations are performed by pressing and holding the PATT.CLR button (← key) together with the pattern you wish to cut, copy or paste into.



The screen border turns gray and the software stops and awaits your choice of action. Then press:

- **X** key to cut the pattern selected. The pattern is erased and its content is placed into the copy buffer.
- **C** key to copy the pattern selected. The pattern is left untouched but its content is placed into the copy buffer.
- **V** key to paste the copy buffer data into the pattern selected.
- **RUN/STOP** key Cancel operation

As you can see Bassline uses the same standard keys like any other PC operating system for cutting, copying and pasting so it's quite easy to remember.

When you have performed the copy/paste the screen border returns to black and you regain control of the program.

Edit the Sound

To control the MSSIAH Bassline's sound engine there are six knobs on the upper part of the screen.



Tuning

To tune the sound down, turn the tuning knob anti-clock wise, to tune it up, turn the knob clock wise. Tuning is available in 12 steps for both directions.

Cutoff

The cutoff knob controls the cutoff frequency of the low pass filter.

Resonance

This knob controls the filter's resonance.

Env

Envelope sets the amount of envelope modulation on the filter.

Decay

The decay knob controls the decay time of the filter envelope.

Accent

The level and effect of the accentuated notes are controlled with this knob.

Select Waveform

The sound played by the MSSIAH Bassline can either use a saw tooth waveform or a pulse waveform. Select the one you want for your bass lines.

Pulse width

When using the pulse waveform you can adjust the width of the pulse wave by turning the knob in the middle section of the screen marked with a pulse icon.



Note:

Each parameter described in this chapter is accessed with a certain key on the C64 keyboard. In the *Key Map* chapter you will find a complete list of those keys.

A word about the SID filter

As mentioned earlier in this manual it is absolutely essential that you run this application on a SID 8580. The whole “303-engine” built in to mimic accents and TB-303 squeals was adapted for that particular chip.

Not to say that the program wont run on a SID 6581 but it will not sound anywhere near a 303.

One issue when running this software on really old machines is that the result may be a complete silence. That is due to old SIDs not being able to produce decent sound when the filters are turned on. If you are not aware of this fact you might think that the software or computer is malfunctioning.

How to Improve Audio Quality

When using the SID circuit inside the Commodore 64, the computer’s graphic chip (the *VIC*) adds a significant amount of noise in the audio chain.

The easiest way to reduce the noise is to blank out the screen. In the Bassline, the screen goes blank whenever you press the **SPACE BAR** key. Press it again and it reappears.




A convenient way to put this off your checklist when recording is to make use of the automatic blank-screen feature. It blanks the screen as the sequencer starts playing and brings it back when it stops. External or internal sync does not matter, it works in both modes.

You find the setting in the general controls labeled with an icon that looks like a TV-set.

In MIDI mode the screen goes blank no matter the blank screen setting.

Tap

You can test the sound at any time by pressing the tap button (**RETURN** key). This produces a middle-C tone as long as you keep the tap button depressed. It’s a great way to quickly test your sound settings.



The tap feature works in Normal Mode only.
It is disabled in external sync mode.

Settings

The Bassline settings, i.e., MIDI, controls, synchronization etc, are available in the Setup Screen. Access the screen by pressing the **CTRL** key and use the **CRSR** keys, ← key and **RETURN** key to navigate, cancel and select action.

Controls

Pot/Joy settings were covered earlier in this manual. Check out the section *Select Control* in the chapter *User Input Controls* to learn how to select controls for this application.

Synchronization



Sync

Sync selects the input for synchronization to play the sequencer patterns via MIDI.

<i>MIDI CLK</i>	MIDI clock through the MIDI Input of the MSSIAH MIDI interface on the cartridge
<i>MIDI + PSEL</i>	MIDI clock + pattern select
<i>USER PORT</i>	Use Sync24 input on the user port

When Bassline is switched to external sync mode these settings determine how the program responds to external sync signals.

The *MIDI+PSEL* accepts MIDI note input on the MIDI receive channel (see the *MIDI Mode* chapter). Any white key between C₁ and D₃ corresponds to pattern 1-16 in the current group.

The *USERPORT* option makes Bassline respond to a Sync24 signal fed into two dedicated pins on the user port. That way you can slave the application to units such as the TR-606, TR-707 etc.

Read more about Sync24 and the user port in the booklet *MSSIAH – Getting Started*, download it on www.mssiah.com.

Tics

Tics refer to how many tics of the sync clock it takes to play a full beat. A value of 24 is the standard sync rate whereas 48 makes the Bassline play at half speed thus needs the double tempo to keep up.

48 tics is a great way of getting some extra shuffle resolution but it requires your master sequencer to play at double speed.

On Edit

This parameter controls the behavior of the pitch and time modes.

If you select *PLAY* the notes you play or tap do not echo and the sequencer continues playing. Live changes while the pattern is playing are possible.

HOLD means that the pattern sequencer stops and you will be able to hear the notes play back when entered or tapped.

Release

This is the envelope init on release-setting for the MSSIAH Mono Synthesizer. It is not available in MSSIAH Bassline.

System

Commodore 64s came in two different versions, one for the NTSC TV-system and one for the PAL TV-system. Since NTSC versions run a little faster and play music at a slightly higher pitch, it's a good idea to adjust the Bassline to whatever system your computer was built for. So how do you know what system your C64 is adapted to? Well, it's a matter of knowing what type of TV-system your country/region has got. Generally one can say that most countries in Europe run the PAL system whereas North America and Japan use NTSC.

**Slide Time**

The slide time is adjustable in four steps on the Bassline. A setting of 3 (default) is equal to the TB-303 slide.

MIDI

Check out the chapter *MIDI Mode* for more info on MIDI settings.

Advanced Random Composer

The Advanced Random Composer (A.R.C.) is a built in randomize feature where you can create harmonically interesting results from a set of rudimentary input parameters.


The program then uses those parameters to fill a pattern with total random notes, though pre-determined out of your settings.

The result can be anything from totally awesome new inspiring music to a complete mayhem, it all depends on your inputs.

Your C64 needs to be equipped with a fully operational SID in the original socket (SID oscillator #3 is used to obtain random numbers).

The A.R.C. is located in the Setup screen. Press the **CTRL** key to access it and then use the **CRSR** keys to navigate to the *A.R.C* menu.

Random patterns are created by first telling the A.R.C. how to operate (*Settings*) and then executing the randomizer itself (*Random!*).

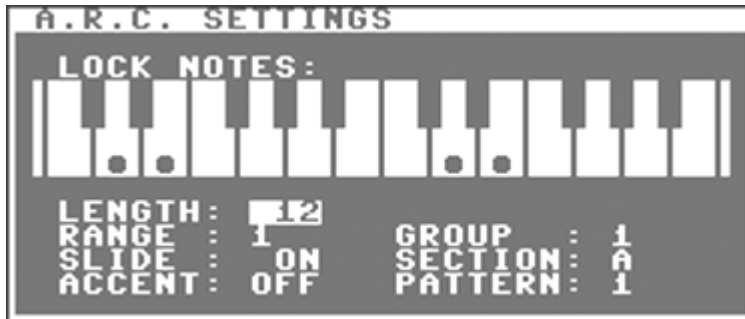

Lock Notes

Use the upper and lower part of your C64 keyboard to toggle the notes you wish to include in the randomize process.

Press **CLR/HOME** key to clear all selected notes.

Length

The length parameter determines how many notes that will be included in the pattern. Select any number of notes between 1 and 16. If you choose RND, the A.R.C. makes that decision for you instead.

LENGTH : RND

Range

The range parameter sets the octave span used in the random process. That means the locked notes are randomly placed within that range.

RANGE : 3

Slide

Select whether to include random slides or not.



SLIDE : ON

Accent

Select whether to include random accents or not.



ACCENT : ON

Group/Section/Pattern

Select which pattern to use for the random process by choosing *Group* (1-4), *Section* (A/B) and *Pattern* (1-8). The currently selected pattern is automatically pre-selected when entering the Setup screen. If you change the selected pattern in the A.R.C. it also changes the selected pattern on the Main Screen



GROUP : 3
SECTION : B
PATTERN : 5

Random!

When you have completed the A.R.C. settings, select the *Random!* menu item in the *SETTINGS* menu and the random process starts.

(Note: If you forgot to lock any notes the task exits.)



When the A.R.C. is done creating your random pattern it automatically opens it up with the editor window.



Example

Look at the picture of the overall A.R.C. settings in the top of this chapter and input the same parameters. Those settings have proved to produce interesting results more than often. Try it out, add some notes, try it with and without slide.

Learn to use the Advanced Random Composer as a tool to complement your creativity, or for that matter, a last minute help in absence thereof.

Editor

The pattern editor provides an alternative way of editing patterns featured in the A.R.C. It is opened automatically when a random pattern has been created. You can open it manually by selecting the *Edit* item in the *A.R.C.* menu.




The editor is a simple form of piano-bar grid editor where the horizontal positioning of the 'dot' represents the timing and the vertical position its note value.

Navigating

Use the **CRSR** keys to move the cursor forward and backwards. The cursor is the vertical bar just above and below the grid.

Each note octave is represented by different colors. Blue notes reside one octave down, green notes are played back at normal pitch whereas light green notes are transposed one octave up. Yellow notes indicate an accent.

At the lower left corner you can read out the current note in plain text.

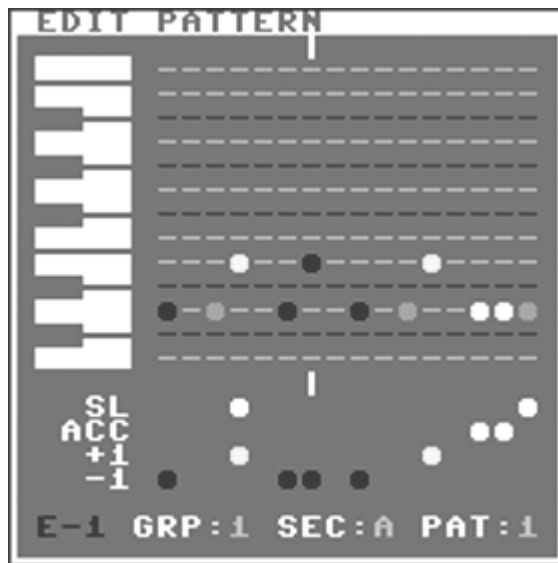

Delete

If you press the **INST/DEL** key all the notes to the right of the cursor are shifted one step to the left. The note on the cursor's position is overwritten.

Note that even the pattern length is decreased at the same time. If you wish to keep the same pattern length you will need to make the appropriate insertion to make up for the shortened length.

Insert

Insert is the opposite of delete. When inserting a note, all the ones to the right are pushed one step forward. Use **RIGHT SHIFT** key together with the **INST/DEL** to perform an insertion. As you make the insert, the rest of the pattern is moved one step to the right and leaves an open space at the cursor's position for you to insert a new note. Notes that are pushed outside of the window are lost.

Clear pattern

Press **RIGHT SHIFT** key and **CLR/HOME** key to clear the whole pattern. You are asked to confirm your choice before the pattern is cleared.

Alter notes

Use the note keys (**Q2W3ER5T6Y7UI**) to alter the note value at the cursor's position. Octaves and slides are not affected.

Octaves

Use **+** and **-** keys to toggle the octave on the note at the cursor's position.



Accents

Use **£** key to toggle an accent for the note at the cursor's position.

Slides

Use **CLR/HOME** key to toggle a slide for the note at the cursor's position.

Change pattern

When you start up the editor it holds the current pattern selected. You can change this at any time.


F1/F2 keys change banks
F3 key toggle section A/B
F5/F6 keys select pattern

GRP:1 SEC:A PAT:1

If you change the pattern in the editor, you also change the current pattern in the Main Screen.

Toggle grid

You can toggle the grid on and off by pressing the **F7** key.

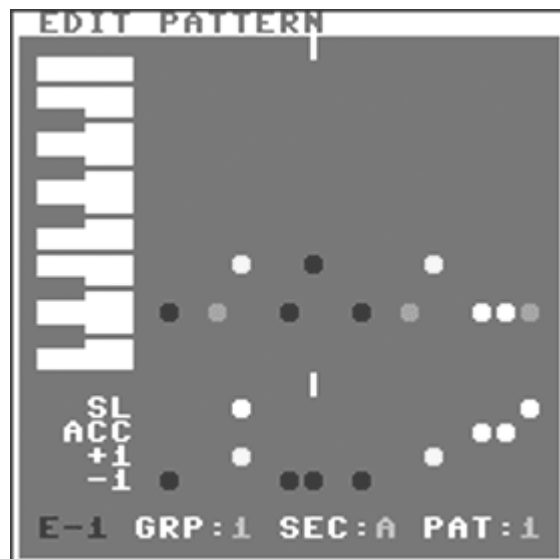

Files

Press **CTRL** key to open the Setup Screen. From here you access the Bassline file operations. Use **CRSR** keys and **RIGHT SHIFT** to navigate and **RETURN** key to execute a function/select file etc. Use ← key to cancel/step back.

Media

Bassline supports loading and saving from disk or tape.

Disk

All disk operations start by asking you to choose device number:



Unless you have changed your disk drive's device number, 8 is default, use **CRSR** keys to change device number.

Loading from disk means that a directory window opens with a list of valid files on your floppy. You then select the file you wish to load.

The directory window shows the amount of free blocks in the upper right corner.



The file operations for the floppy drive make use of the operating system's basic disk functionality. There are no delete-functions and no replace-and-save options built in. If you try to save the file onto disk using an already existing name the save is interrupted and the drive light flashes.

When reading the directory the correct type of files is automatically collected. If there are no files of that particular type on the disk you will get a *No Files* error. It does not necessarily mean that the disk is empty rather than empty of that type of files.

The file type depends on the file operation you selected, whether it's a full project load or a specific import.

MSSIAH Bassline File Types:

File suffix	Disk space	Tape no.	Size	
.303	11 blocks	≈ 23	2.5 Kb	Bassline project
.PAT	1 block	≈ 7	< 1 Kb	Single pattern export


Exported patterns are compatible with the MSSIAH Mono Synthesizer and vice versa.

Tape

The tape functions are standard C64 and not turbo tape.

A small modification bypasses the regular start and record button sensitivity so that it's up to the user to initiate the start of a tape load or save.

This opens up the possibility to modify a digital audio source to replace the standard 1530 datasette unit.



Whenever loading and saving you will have to press **SPACE** key on the C64 to make the computer start the load/save.

When loading, MSSIAH Bassline checks the type of the file found. If the file suffix does not match the correct one, loading is interrupted and you are notified.

If the file type is correct, loading automatically continues and the screen color turns green to confirm that the file is ok.

Note:

The tape motor is shut off at all times until you request a load or save. As the dialog box asks you to start recording or playing it is finally switched back on.

You probably need to rewind or forward the tape to the right position before loading or saving so now is the time to do so. Since the datasette buttons are not being sensed, pressing rew/ffw will not trigger the load/save. Only the **SPACE** key does.

Opening the Demo Patterns

To open the demo patterns:

- Select *Open* in the *FILE* menu.



- Navigate with the **CRSR** keys to the menu item *DEMO*.



- Press **RETURN** key to select to open the patterns.
- Press **Y** key or **RETURN** key to confirm. The **N** key or ← key cancels.
- When the demo project is opened (takes a split second) press ← to return to the Main Screen.

Save Project

A project save includes all the patterns, control settings and sound parameters. Make sure to save often to avoid losing your work!!

To save a Bassline project:

Disk:

- Select *Save* in the *FILE* menu.



- Use **CRSR** keys and select *DISK* as media source and press **RETURN** key.
- Enter a non-existing filename in the filename dialog.



You can use all letters from *a-z* and *0-9* as well as some additional characters. Use **INST/DEL** key with and without the **LEFT SHIFT** key to insert/delete text.
Press **RETURN** when ready or ← to cancel and go back.

- Select device (8 is default).
- File saves onto disk. After saving is done press ← key to return to the Main Screen.
- If the disk already contains a project file with the same filename the drive light flashes and you are notified with a Save Error message box.

Tape:

- Select *Save* in the *FILE* menu.
- User **CRSR** keys to select *Tape* as media source and press **RETURN** key.
- Enter a filename in the dialog and press **RETURN** when ready or ← to cancel.
- A dialog box asks you to press **REC+PLAY** on your tape recorder and then press **SPACE** key to start the save. The tape motor is now unlocked for you to first rewind or forward the tape to the correct position.
- Press **SPACE** key to start saving.
- Screen goes blank while saving.
- When saving is done press ← key to return to the Main Screen.
- You can break the save operation anytime during saving by pressing the **RUN/STOP** key.

Open Project

To open a Bassline project:

Disk:


- Select *Open* in the *FILE* menu.



- Insert the disk with the project file you wish to open.
- Use the **CRSR** keys to select *DISK* as media source and press **RETURN** key.
- Select device (8 is default).
- Wait until the directory is loaded.
- In the directory window use **CRSR** keys to navigate to the file you wish to load and press **RETURN** key to start loading. If you wish to cancel press ← key to go back one step. If there are no files on the disk you will be notified by a message box saying *No files*. In that case press ← key to go back, insert a new disk and try again.
- When the file is loaded you press the ← key to exit the files screen.

Note:

Important! If you interrupt a load process of a Bassline project you are warned that the application could suffer from an unrecoverable failure. While this is a major case for the Sequencer edition (all MSSIAH editions share file functionality) it is of lesser importance for the Bassline. To not cause misbehavior of the application you are advised to initialize memory if you for any reason have interrupted a load operation.

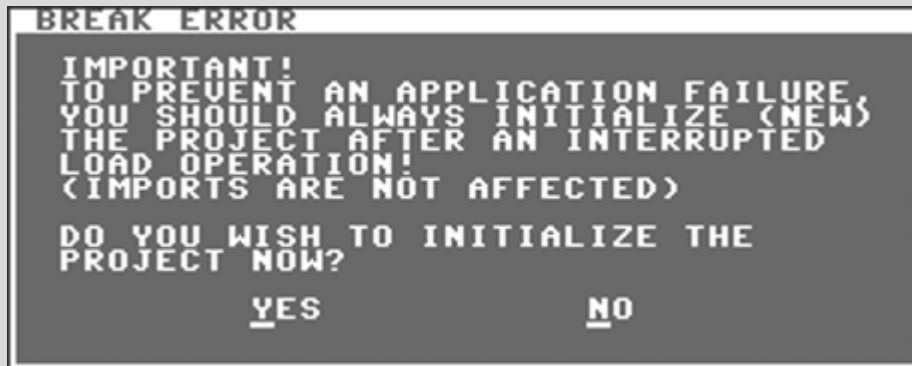

Press **Y** key or **RETURN** key to go through and initialize the memory.

If you do not carry out this initialization now you can do it later at any time with the *New* function in the *FILE* menu.

This message pops up if you interrupt an import also. However, imports cannot do any harm whatsoever so you can just ignore it.

Export Pattern

You can export the full content of a pattern onto disk or tape.

The exported pattern can be imported back into the Mono Synthesizer and Bassline editions.

To export a pattern:

- Select *Export* in the *FILE* menu.



The pattern that is exported is the current pattern selected in the Main Screen.

If you have selected a chain of patterns only the first one is exported.

- Continue to read the section for your media choice below:

Disk:

- Use **CRSR** keys to select *Disk* as media source and then press **RETURN** key.
- Enter a non-existing filename in the filename dialog. You can use all letters from *a-z* and *0-9* as well as some additional characters. Use **INST/DEL** key with or without the **LEFT SHIFT** key to insert/delete text.
- Press **RETURN** key to start saving or ← to cancel.
- Select device (8 is default).
- When done saving, press ← key to return to the Main Screen.
- If the disk you have inserted already contains a pattern file with the same name the drive light flashes and you are notified with a Save Error message box.

Tape:

- User **CRSR** keys to select *Tape* as media source and press **RETURN** key.
- Enter a filename in the dialog and press **RETURN** when ready or ← to cancel.
- A dialog asks you to press **REC+PLAY** on your tape recorder and then press **SPACE** key to start the save. The tape motor is now unlocked for you to first rewind or forward the tape to the correct position.
- Press **SPACE** key to start saving.
- Screen goes blank while saving.
- When saving is done press ← key to return to the Main Screen.
- You can break the save operation anytime during saving by pressing the **RUN/STOP** key.

Import Pattern

Exported patterns can be imported into existing ones. Even exported Mono Synthesizer patterns are compatible (except for the fourth octave).

The import is loaded into the currently selected pattern on the Main Screen.

Selecting a chain of patterns does not matter. The first one in the chain is always the destination.

To import a pattern:

- Select *Import* in the *FILE* menu.



- Press **RETURN** key and continue to read the section for your media choice below:

Disk:

- Use **CRSR** keys to select *Disk* as media source and then press **RETURN** key.
- Select device (8 is default).

- Select a file in the directory list.
(If the disk you have inserted does not contain any pattern files you are notified with the *No files* message box.)
- When done loading, press ← key to return to the Main Screen.

Tape:

- Use the **CRSR** keys to select *Tape* as media source and press **RETURN** key.
- A dialog asks you to press **PLAY** on your tape recorder and then press **SPACE** key to start loading. The tape motor is now unlocked for you to first rewind or forward the tape to the correct position.
- Press **SPACE** key to start loading and the screen goes blank.
- When a pattern file (*.PAT*) is found the screen color turns green and the file continues to load. If a different file type is found the operation is halted.
- When loading is done press ← key to return to the Main Screen.
- You can break the load operation anytime during the load process by pressing the **RUN/STOP** key.
However, this opens the initialize screen asking you to clear the memory. Read more about it in the *Open Project* section.

Example Guide to Editing Patterns

For beginners, the concept of pattern editing might be a bit confusing at first. A neat help on the way to master the skills of 303 pattern editing is real world examples:

- Example 1 – Michael Jackson, "Thriller"

The first example uses the classic bass line that is repeated throughout the 1982 Michael Jackson hit song "Thriller". The musical score looks something like this:



Translated to MSSIAH Bassline pitches and time lines it looks like this:

-C# MINOR, sixteen steps-

Pitches:

B C# E F# C# C# C#

Time line:

ON-OFF-ON-OFF-ON-OFF-ON-OFF-ON-OFF-PAUSE-ON-PAUSE-PAUSE-PAUSE-ON

The first and sixth notes are played in the lowest octave.

- Select an empty pattern with **1 - 8** keys.
- Enter Pitch Mode with the **F1** key.
- Enter all the notes with the following keys: **U 2 E 5 2 2 2**
- Enter the octaves: Press **F1** key once to rewind Pitch Mode counter, press and hold the **RETURN** key and then press the + key
- Tap (**RETURN** key) forward to the sixth one, hold the tap button and press + key.

The notes are now entered. Move on to the time line:

- Enter Time Mode with **F3** key.
- Enter timing values with keys: **+ - + - + - + - £ + £ £ £ +**
This will correspond with the time line of on, offs and pauses that we picked out from the score earlier.

Hit **RUN/STOP** key or, if synced externally, start the master sequencer and listen to the result.

- Example 2 – "Billie Jean"



-F# minor, sixteen steps-

Pitches:

F# C# E F# E C# B C#

Time line:

ON OFF ON OFF ON OFF ON OFF ON OFF ON OFF ON OFF ON OFF
+ - + - + - + - + - + - + - + -

Follow the procedure from example 1 but use these keys instead:

PITCH: **5 2 E 5 E 2 B--+ 2**

TIME: **+ - + - + - + - + - + -**

(**B--+** means that **B** and **+** are pressed at the same time)

- **Adding accents** -

Let's spice Billie Jean up with some accents.

If you listen closely to the original track you can notice a slight accentuation of the first and fourth notes. By adding bassline accents to the same notes in this pattern and then adjusting the accent setting you will get the same effect.

- Press the Pitch Mode button (**F1** key) once
- Press the TAP-button (**RETURN** key) once and hold it down.
- Press the Accent button (**£** key) once to turn accent on for the first note.
- Use the TAP-button to step to the fourth note (press three times and hold the last one).
- Press the Accent button to turn on accent for the fourth note also.

Now you have accents on your bass line, press Normal Mode button (**F7** key) and push the **RUN/STOP** button to hear it!

Key Map

A full overview of keys used in the MSSIAH Bassline (US/English keyboard).

General Keys:

| | |
|-----------------|---------------------------|
| RUN/STOP | Start/stop playing |
| SPACE | Manually blank the screen |
| F1 | Pitch Mode |
| F3 | Time Mode |
| F5 | Transpose Mode |
| F7 | Normal Mode |
| CTRL | Setup Screen |
| RETURN | Tap (test tone) |
| ← | Pattern clear |

Tone Controls

| | |
|------------------------|--|
| A | Mix in (external filter on) |
| S | Saw tooth waveform |
| D | Pulse waveform |
| F | Tuning |
| G | Filter frequency |
| H | Filter resonance |
| J | Filter envelope amount |
| K | Filter envelope decay |
| L | Accent amount |
| @ | Blank screen |
| * | MIDI sync
(use LEFT SHIFT key w/ controller to activate) |
| RIGHT SHIFT + ↑ | MIDI Mode
(press RUN/STOP key to exit) |
| ↑ | Dump pattern control change data
(press any key to exit) |
| Z | Tempo (internal sync) |
| X | Pattern group selector |
| C | Shuffle |
| V | Pulse width |
| / | Main volume |

Pattern Sequencer Pitch Mode

| | |
|----------------------------------|--|
| F1 | Reset step counter (restart editing) |
| F7 | Normal Mode |
| RETURN | “Tap”, one step forward / edit current |
| INST/DEL | One step backward |
| Q2W3ER5T6Y7UI | Note keys |
| + | Toggle -1 octave (down) |
| - | Toggle +1 octave (up) |
| £ | Toggle accent |
| CLR/HOME | Toggle slide |
| RIGHT SHIFT + INST/DEL | Insert note at current position |
| COMMODORE (C=) + INST/DEL | Delete note at current position |

Pattern Sequencer Time Mode:

| | |
|----------------------------------|--------------------------------------|
| F3 | Reset step counter (restart editing) |
| F7 | Normal Mode |
| RETURN | “Tap”, one step forward |
| INST/DEL | One step backward |
| + | Note on |
| - | Note off |
| £ | Pause |
| RIGHT SHIFT + INST/DEL | Insert note at current position |
| COMMODORE (C=) + INST/DEL | Delete note at current position |

MIDI Implementation Chart

| MSSIAH
Bassline | | MIDI Implementation Chart | | Version: 1.00 |
|--------------------|---------------|---|--|--|
| Function | | Transmitted *1 | Recognized | Remarks |
| Basic Channel | Default | X | 1-16, off | Memorized |
| | Changed | X | 1-16, off | Memorized |
| Mode | Default | X | Mode 4 | |
| | Messages | X | X | |
| Note Number: | True Voice | X | 24-60 (C ₀ – C ₃) | |
| | | X | 24-60 (C ₀ – C ₃) | |
| Velocity | Note On | X | 9nH, v=1-127 | Above 80 = Accent |
| | Note Off | X | 9nH, v=0 or 8nH | |
| After Touch | Key's | X | X | |
| | Channel's | X | X | |
| Pitch Bend | | X | o | 0-24 semitone steps
(14 bit resolution) |
| Control Change | 7 | X | o | *2 |
| | 66-85 | X | o | *2 |
| | 120 | X | o | |
| | 123 | X | o | |
| Program Change: | True # | X | X | |
| | | X | X | |
| System Exclusive | | X | X | |
| System Common: | Song pos | X | X | |
| | Song sel | X | X | |
| | Tune | X | X | |
| System Real Time: | Clock | X | o | Start, Stop |
| | Commands | X | o | |
| Aux Messages: | All Sound OFF | X | (120) o | Pitch Wheel only |
| | Reset Cntrl | X | o | |
| | Local ON/OFF | X | X | |
| | All Notes OFF | X | (123) o | |
| | Active Sens | X | X | |
| | System Res | X | X | |
| Notes | | *1 MSSIAH Cartridge does not transmit MIDI.
*2 Values outside of limits are recognized as top or bottom value. | | |

Mode 1: OMNI ON, POLY
Mode 3: OMNI OFF, POLY

Mode 2: OMNI ON, MONO
Mode 4: OMNI OFF, MONO

o : Yes
X : No

MIDI Controller List

| No. | Function | Limit | Remarks |
|-----------------------|-------------------------------|-------|---|
| 7 | Main Volume | 0-15 | |
| 66 | Slide Time | 1-4 | |
| 67 | Mix In | 0-1 | 0 = Off, 1 = On |
| 68 | Waveform | 0-1 | 0 = Saw, 1 = Pulse |
| 69 | Tuning | 52-76 | 52 = -12, 64 = Middle, 76 = +12 |
| 70 | Cutoff | 0-31 | |
| 71 | Resonance | 0-15 | |
| 72 | Envelope | 0-31 | |
| 73 | Decay | 0-31 | |
| 74 | Accent | 0-15 | |
| 75 | Shuffle | 0-7 | |
| 76 | Pulse Width | 0-7 | |
| 77 | Transpose Pattern | 0-12 | |
| 78 | Current Pattern | 1-64 | Four groups: 1-16, 17-32, 33-48, 49-64 |
| Pattern Edits: | | | |
| 79 | Set Pattern Position to Edit | 1-16 | Position within the pattern |
| 80 | Unlock Pattern | 0-1 | 0 = Unlock (start editing), 1 = Lock |
| 81 | Set Pattern Length | 1-16 | |
| 82 | Set Note @ Pattern Position | 0-36 | Note number. Overwrites slides/accent |
| 83 | Set Accent @ Pattern Position | 0-1 | 0 = Off, 1 = On |
| 84 | Set Slide @ Pattern Position | 0-1 | 0 = Off, 1 = On |
| 85 | Set Time Code @ Patt. Pos. | 0-2 | <p>0 = — Pause and silence
 1 = ● Trig note
 2 = ○ Pause and hold</p> <p>Set Time Code also increases pattern position one step. Once pattern length is reached, pattern buffer is copied onto the real pattern and pattern is locked.
 Set position cc #79 cannot trigger buffer copy alone.</p> |
| 120 | All Sound Off | - | |
| 123 | All Notes Off | - | |

MIDI channel and bend ranges are saved in between sessions and even when the computer is switched off if you choose to save your changes when shutting down the MSSIAH.